




Gateway6 4mG

Cloud-managed VPN Router with 4 x 2.5-Gigabit (1x PoE+) Ethernet ports

Overview

EnGenius ESG610 Cloud-managed VPN Router provides a high-performance network solution with advanced features, including load balancing, dual-WAN, and site-to-site VPN. The product offers unified management through EnGenius Cloud, allowing for easy configuration and management from anywhere. It offers a comprehensive end-to-end solution for businesses seeking to enhance their network performance and security.

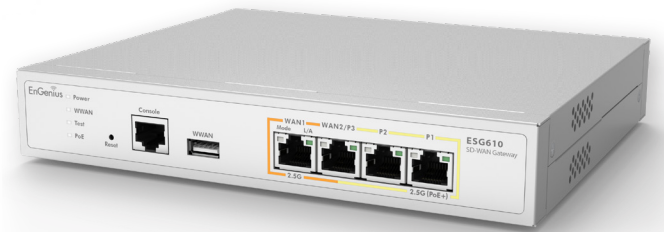

Features & Benefits

- Simple, unified cloud management for any size business
- Intuitive and centralized device visibility from anywhere
- Dual 2.5GE WAN and Dual 2.5GE LAN for maximum performance
- Quad-core 2.2 GHz processor for greater speed and power
- Built-in load balancing and safeguards with dual-WAN and cellular failover
- 2.5 GbE PoE+ to power up a Wi-Fi 6E AP, IP camera or IP phone
- Stateful firewall with high-efficiency filtering and inspection to enhance security
- High-speed and secure site-to-site VPN and client VPN
- Quick self-healing VPN and VLAN setup for faster and easier deployments
- Touchless system maintenance and automatic updates
- Multiple passthrough and routing options
- Captive portal with external radius capabilities

Technical Specifications

Technical Specifications

CPU Processor

Quad Core

Operating Frequency

2.2GHz

Memory

8GB

Flash Storage

8GB

RJ-45 Interface

4x2.5G

PoE ports

1

PoE Standard

802.3 af/at

I/O Interfaces

1 x RJ-45 console/1 x USB 3.0

Mounting Method

Wall mount

Security

TPM

Performance & Capacity

Firewall (SPI throughput)

6.8G

VPN throughput

1.5G

Max. Concurrent VPN Tunnels

300

Max. Concurrent VPN Users

380

Max. TCP Concurrent Sessions

1,250,000

Max VLAN

160

Firewall

Firewall Features

Stateful Packet Inspection

Policy Rules

Port Forwarding

1:1 NAT

Allow Inbound Services

VPN

Site-to-Site VPN

Mesh VPN/ Hub-and-Spoke

Encryption

3DES, AES (256/192/128-bit)

Authentication

MD5, SHA1, SHA2 (256-bit)

Key Management

IKEv1 (x-auth, mode-config)

IKEv2 (EAP, configuration payload)

VPN Features

Site-to-Site VPN

Client VPN(IPsec/SecuPoint SSL)

Policy-based VPN

IPSec NAT traversal (NAT-T)

Dead Peer Detection (DPD)

Auto-VPN Connection

Auto NAT traversal

Networking

Operation mode

Routed / Passthrough

Multiple WANs

Dual

Bandwidth Limit

Per client/ Per Interface

Traffic Load Balancing

WAN load balancing with WRR

Networking Features

Static Route

Multiple WANs

USB Cellular

User Authentication

PPPoE

VLAN Tagging

Captive Portal

Custom Splash Page

Bandwidth Limit

Traffic Load Balancing

DHCP client/server/relay

Dynamic DNS support

Policy Based Routing

Technical Specifications

Environmental & Physical

Power
54V/1.2A
Operation Temperature
0°C to 40°C
Humidity (non-condensing)
5 to 95% non-condensing


Dimensions & Weight

Dimensions
Width: 210mm
Length: 179.5mm
Height: 35mm
Package Contents
Power adapter
Power cord
RJ-45 Console Cable
Wall Mount Kit
Product Card

Compliance

Regulatory Compliance
FCC Part 15 (Class B)
IC
CE EMC
CB
UL

Hardware Overviews

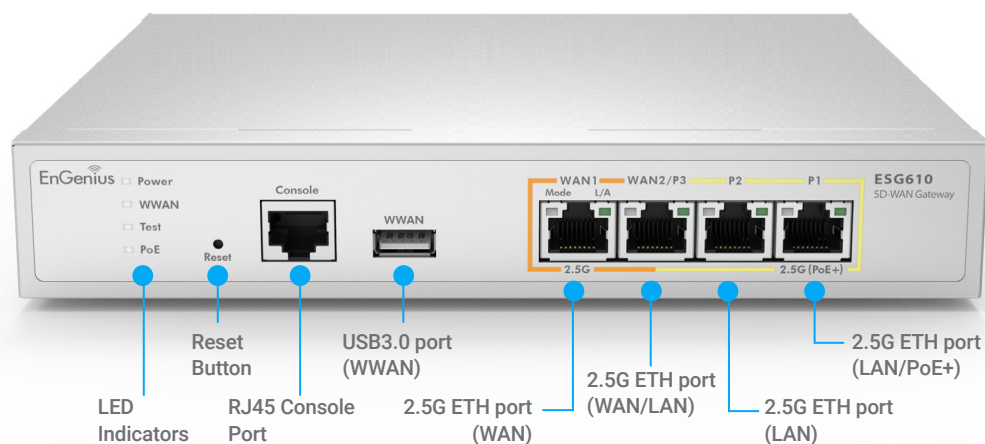

EnGenius Technologies | Costa Mesa, California, USA

Email: support@engeniustech.com
Website: www.engeniustech.com
Local contact: (+1) 714 432 8668

EnGenius Networks Singapore Pte Ltd. | Singapore

Email: techsupport@engeniustech.com.sg
Website: www.engeniustech.com/apac
Local contact: (+65) 6227 1088

EnGenius Technologies Canada | Ontario, Canada

Email: support@engeniustech.com
Website: www.engeniustech.com
Local contact: (+1) 905 940 8181

EnGenius Networks Dubai | Dubai, UAE

Email: support@engeniustech-me.com
Website: www.engeniustech.com/apac
Local contact: (+971) 4 339 1227

EnGenius Networks Europe B.V. | Eindhoven, Netherlands

Email: support@engeniustech.com
Website: www.engeniustech.com/eu
Local contact: (+31) 40 8200 887

恩碩科技股份有限公司 | Taiwan, R.O.C.

Email: sales@engeniustech.com.tw
Website: www.engeniustech.com/tw
Local contact: (+886) 933 250 628

Features and specifications subject to change without notice. Trademarks and registered trademarks are the property of their respective owners. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his/her own expense. Prior to installing any surveillance equipment, it is your responsibility to ensure the installation is in compliance with local, state and federal video and audio surveillance and privacy laws.

Version 1.5 07192024

EnGenius