




# Quick Start Guide

EnVMS

version 1.0

# Before Getting Started

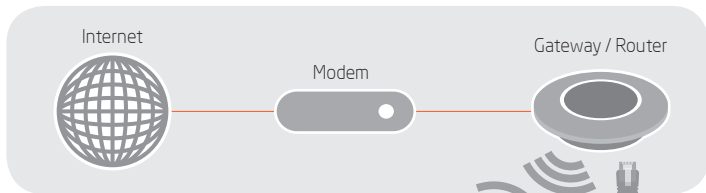

Ensure that your Gateway / Router is already connected to the Internet for proceeding the camera setup.



For Local Network

**Auto Discovery**

For Remote Network

**Manually Configuration**



**Mobile Viewer (APP)**  
**EnVMS**



## 1 Get Started

Find and download the **EnVMS APP** from Apple Store for iOS or Google Play for Android devices.

## 2 Setup Camera

You will have two options to add camera.

**Option I :** Local Network - Auto Discovery

**Option II :** Manually Configuration





## Option I - Auto Discovery

This option is recommended if you want to add multiple cameras within your local network at the same time.

**A)** Click on **Auto Discovery**.

**B)** All cameras within the local network will be listed. Select the device(s) you would like to add and click on **Save**.

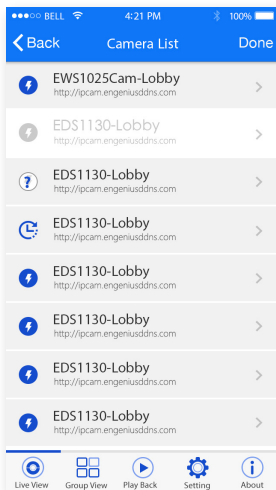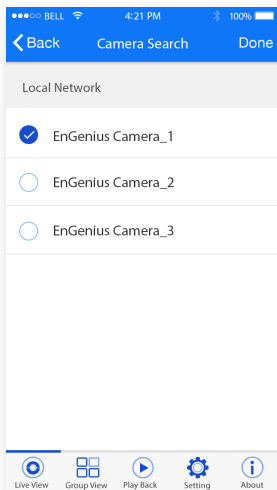



## Option II - Manually configuration

This option is recommended if you want to add camera from remote site for remote live view.

**A)** Click on **Add Camera**.

**B)** Setup the device information and service ports for the Camera.

The screenshot shows the 'Motion Detection' setup screen in the EnVMS app. At the top, there's a blue header bar with a back arrow, the title 'Motion Detection', and a 'Done' button. Below the header, there's a camera icon on the left and an 'Add Cam' button with a plus icon on the right. The main area contains eight form fields, each with an icon and a label: 'Camera Name' (camera icon), 'User Name' (person icon), 'Password' (lock icon), 'Domain / IP' (IP icon), 'APP Port' (APP icon), 'Video Port' (play icon), 'Audio Port' (speaker icon), and 'Storage Port' (storage icon). Each field has a placeholder text: 'camera name', 'user name', 'password', 'domain / IP', '9090', '554', '2000', and '9000' respectively.

Field	Placeholder
Camera Name	camera name
User Name	user name
Password	password
Domain / IP	domain / IP
APP Port	9090
Video Port	554
Audio Port	2000
Storage Port	9000



**C)** Configure the **Port Forwarding** rule in Your Router or Firewall.

**Note:** The Port Forwarding rule must in different setting interface to Routers or Firewalls, please make sure all the ports are mapping with the same parameters of mobile APPs.

☒ **Enable Port Forwarding**

Description

Local IP

Protocol

Local Port

Public Port

Both ▼

Add

Reset

**Current Port Forwarding Table**

No.	Description	Local IP	Local Port	Type	Public Port	Select
1	EWS1025CAM-1	192.168.50.60	9090	TCP	9092	<input type="checkbox"/>
2	EWS1025CAM-1	192.168.50.60	554	TCP	5540	<input type="checkbox"/>
3	EWS1025CAM-2	192.168.50.61	9090	TCP	9093	<input type="checkbox"/>
4	EWS1025CAM-2	192.168.50.61	554	TCP	5541	<input type="checkbox"/>
5	EWS1025CAM-2	192.168.50.61	9010	TCP	9010	<input type="checkbox"/>

Delete Selected

Delete All

Reset


Apply

Cancel



## 3 Live View

Simply select the desired camera to access video live view.

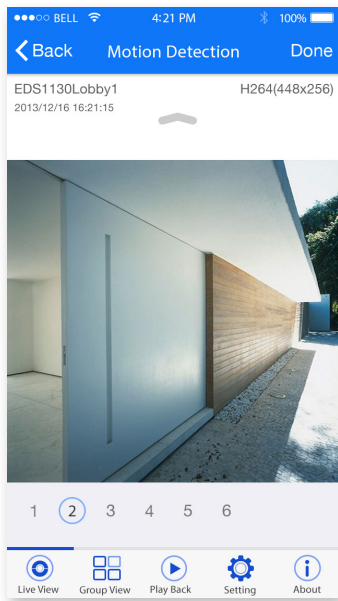

# Technical Support

Country of Purchase	Service Center	Service Information
<b>North America</b> www.engeniuscanada.com	Canada	rma@engeniuscanada.com Toll Free: (+1) 888 397 2788 Local: (+1) 905 940 8181
www.engenius.tech.com	Los Angeles, USA	support@engeniustech.com Toll Free: (+1) 888 735 7888 Local: (+1) 714 432 8668
<b>Central &amp; South America</b> es.engeniustech.com pg.engeniustech.com	Miami, USA	miamisupport@engeniustech.com Miami: (+1) 305 887 7378 Sao Paulo, Brazil: (+55) 11 3957 0303 D.F, Mexico: (+52) 55 1163 8894
<b>Europe</b> www.engeniusnetworks.eu	Netherlands	support@enginiusnetworks.eu (+31) 40 8200 887
<b>Africa CIS Middle East Russia</b> www.engenius-me.com	Dubai, UAE	support@enginius-me.com Toll Free: U.A.E.: 800-EnGenius 800-364-364-87 General: (+971) 4 357 5599
<b>Asia Oceania</b> www.engeniustech.com.sg	Singapore	www.engeniustech.com.sg/e_warranty_form techsupport@engeniustech.com.sg Toll Free: Singapore: 1800 364 3648
<b>Others</b> www.enginiusnetworks.com	Taiwan, R.O.C	technology@senao.com