

CloudSwitch L2Plus 48 PoE

Cloud Managed 48-Port Gigabit PoE+ Switch with 4 SFP+ Ports (ECS1552P)

Introduction

This Quick Start Guide is designed to guide you through the installation of the **CloudSwitch L2Plus 48 PoE**, model **ECS1552P**, including hardware installation and configuration.



FitSwitch 48 PoE

Cloud Managed 48-Port Gigabit PoE+ Switch with 4 SFP+ Ports

Model: ECS1552P

- 48 x 1G PoE+ Ports for high-speed connections.
- 4 x 10G SFP+ uplink ports for bandwidth-intensive applications.

Content Quick Links

[Hardware Installation](#)

[Management Plane](#)

[Option A: Cloud Management](#)

[Option B: Standalone Configuration](#)

Package Contents



ECS1552P



Power Cord



Rack Mount Kit



RJ-45 Console Cable



Rubber Feet Cushion



Product Card

System Requirements


Web Browser:

- Google Chrome (57.0.2987.110 and later)
- Microsoft Edge (80.0.361.103 and later)
- Mozilla Firefox (52.0 and later)

Hardware Overview

Front Panel - Ports & Buttons



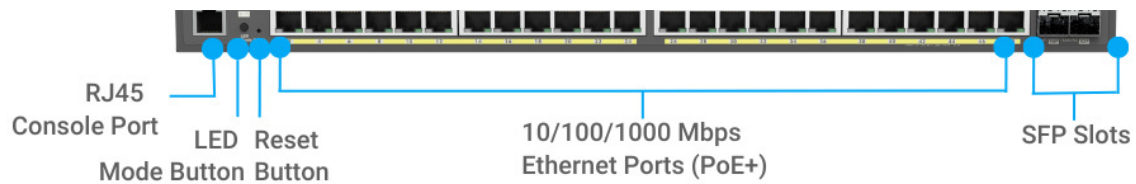

- **Reset to default:** Press and hold for over **10 seconds**, and all ports LED will go off and on. Then the device will be reset to factory default settings.
- **Change LED display mode:** Press the button to change the LED mode to display the PoE status of PoE-enabled ports.

Front Panel - System & Ports LEDs

Systems LEDs LED LED LED

RJ45: Link/Act RJ45: PoE/Speed



LED SFP+ LED:Speed/Link/Act



| Location | LED indicator | Color | Status | Description |
|----------|---------------|-------|-----------|--|
| System | Power | Green | Flashing | Before system boot |
| | | | Solid On | After system boot |
| | | | Light Off | Power Off |
| | Fault | Amber | Solid On | Any fault |
| | | | Light Off | Normal |
| | PoE Max | Amber | Solid On | When the total PoE output power achieve max power budget |
| | | | Light Off | System still have spare power for new PD |
| | LAN Mode | Green | Solid On | Select LED Mode to Ethernet Mode |
| | PoE Mode | Green | Solid On | Select LED Mode to PoE Mode |

| | | | | |
|-------------|----------|-------|-----------|----------------------------------|
| Copper Port | LAN Mode | Green | Solid On | Speed 1000 Mbps |
| | | Off | Light Off | Speed 100/10 Mbps |
| | PoE Mode | Green | Solid On | Power feeding |
| | | Off | Light Off | No Power feeding |
| | Link/Act | Green | Solid On | Link |
| | | | Flashing | Transmit or receive on this port |
| | | | Light Off | No Link |
| SFP Slot | Speed | Green | Solid On | Speed 1000 Mbps |
| | | Amber | Solid On | Speed 100 Mbps |
| | Link/Act | Green | Solid On | Link |
| | | | Flashing | Transmit or receive on this port |
| | | | Light Off | No Link |