

NC-200

RJ21 24AWG Cable 25 Pair Telco male / RJ-45 Female



**Cable 24 AWG
1.5m (4.9ft)**

General Description

The RJ21 Cable(NC-200) is in compliance with NVF-2400S IP DSLAM. Please contact our sales Dep. if there is any request in further information.

Product Specifications


- UL2725 24AWG*2C+AE OD:3.0mm / color:black
- Centronic sulier type (male-50P) / Riveted: #4-40 UNC
- Open nuts on rear shell DIM / insulator color: blue
- Leaded Jack 641 8p / color: gray
- TIE-B150 / BE02 (cable tie of every 500mm)
- Thumb screw F4*37 mm #4-40 UNC Nickel
- Tube clear Ø3.5*15±2mm
- Label color 1~8(Blue), 9-16(Brown), 17~24(White)
- Dimensions: 1500mm(4.9ft)

RJ-21 Telco ports distribution

VDSL 50 Pin RJ-21 Cable Connector List. Cable Characteristic = 24 AWG twist wire

VDSL Port No.	RJ-21 Cable No.	VDSL Port No.	RJ-21 Cable No.
1	24 & 49	13	12 & 37
2	23 & 48	14	11 & 36
3	22 & 47	15	10 & 35
4	21 & 46	16	9 & 34
5	20 & 45	17	8 & 33
6	19 & 44	18	7 & 32
7	18 & 43	19	6 & 31
8	17 & 42	20	5 & 30
9	16 & 41	21	4 & 29
10	15 & 40	22	3 & 28
11	14 & 39	23	2 & 27
12	13 & 38	24	1 & 26
Note: RJ-21 Cable Pin25 & 50 are not used			

Detailed View

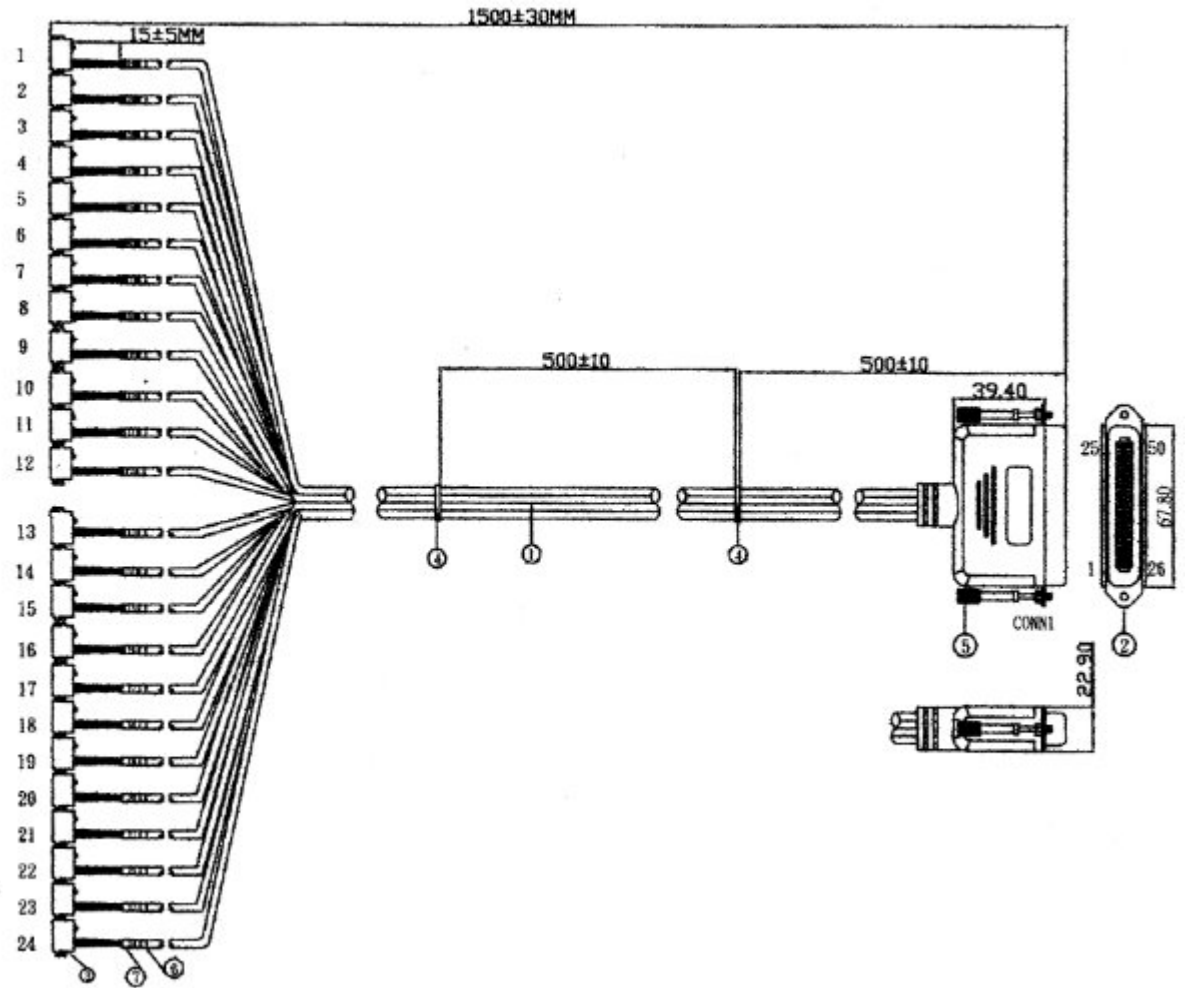

Contact

E-mail: sales@endy.com.au

1300 725 323

1/14 Wellington Street, ACACIA RIDGE QLD 4110 Australia

Check www.endy.com.au for your contact information